



US 20150115905A1

(19) **United States**

(12) **Patent Application Publication**
Hui et al.

(10) **Pub. No.: US 2015/0115905 A1**
(43) **Pub. Date: Apr. 30, 2015**

(54) **POWER COMPENSATOR**

(30) **Foreign Application Priority Data**

(71) Applicants: **Versitech Limited**, Hong Kong (CN);
Imperial Innovations Limited, London (GB)

Apr. 10, 2012 (GB) 1206318.6

(72) Inventors: **Shu Yuen Ron Hui**, Shatin (CN);
Balarko Chaudhuri, London (GB); **Chi Kwan Lee**, Hong Kong (CN); **Nilanjan Ray Chaudhuri**, New York, NY (US)

Publication Classification

(51) **Int. Cl.**
H02J 3/18 (2006.01)
(52) **U.S. Cl.**
CPC **H02J 3/18** (2013.01)

(73) Assignees: **Versitech Limited**, Hong Kong (CN);
Imperial Innovations Limited, London (GB)

(57) **ABSTRACT**

(21) Appl. No.: **14/391,956**


(22) PCT Filed: **Apr. 9, 2013**

(86) PCT No.: **PCT/EP2013/057411**

§ 371 (c)(1),

(2) Date: **Oct. 10, 2014**

A power compensator for compensating voltage at a location along a power transmission line, the compensator having a controller for controlling a voltage generated across the compensator, wherein the voltage is controlled to maintain a power transmission line voltage at a value dependent on the power transmission line location.

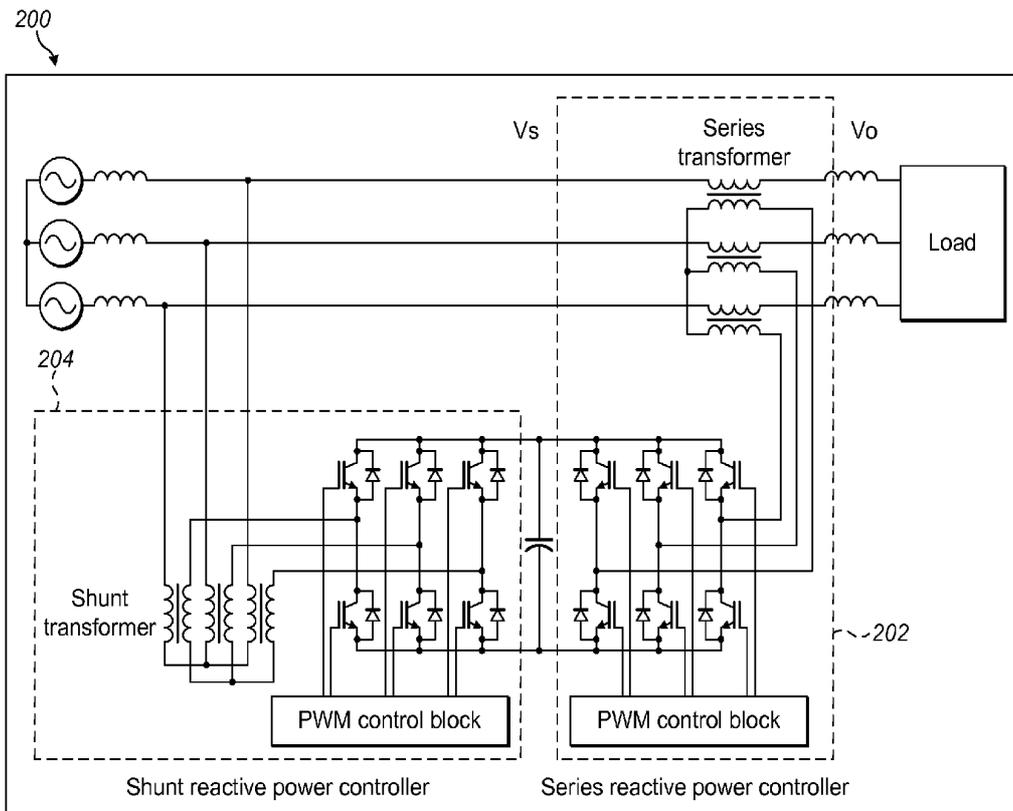

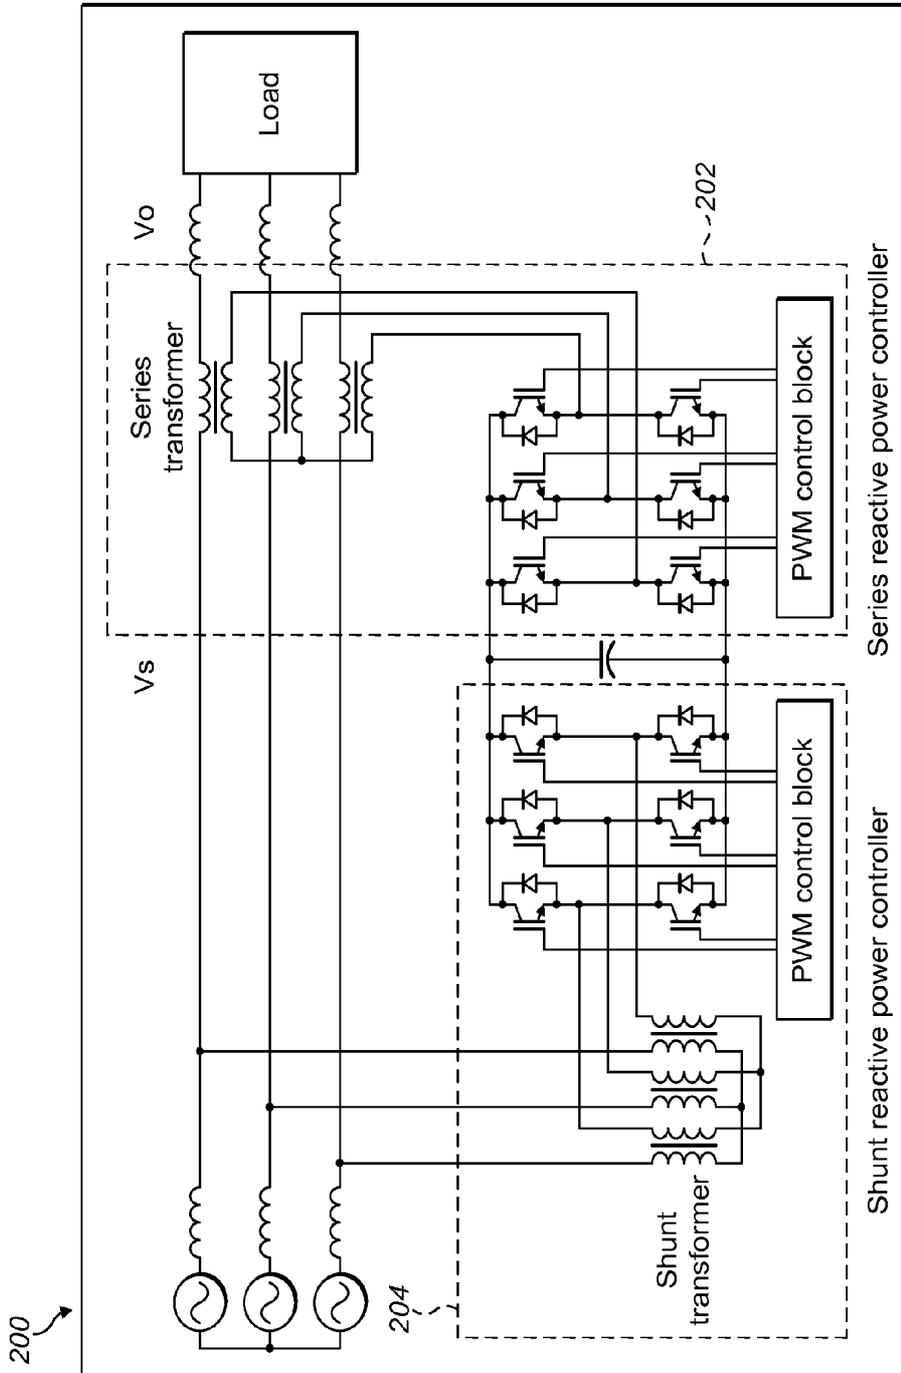


FIG. 2

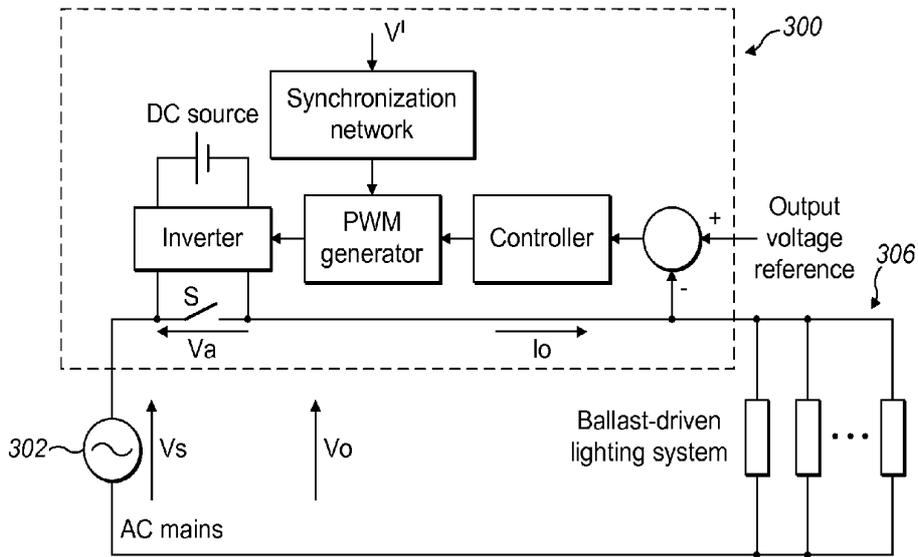


FIG. 3

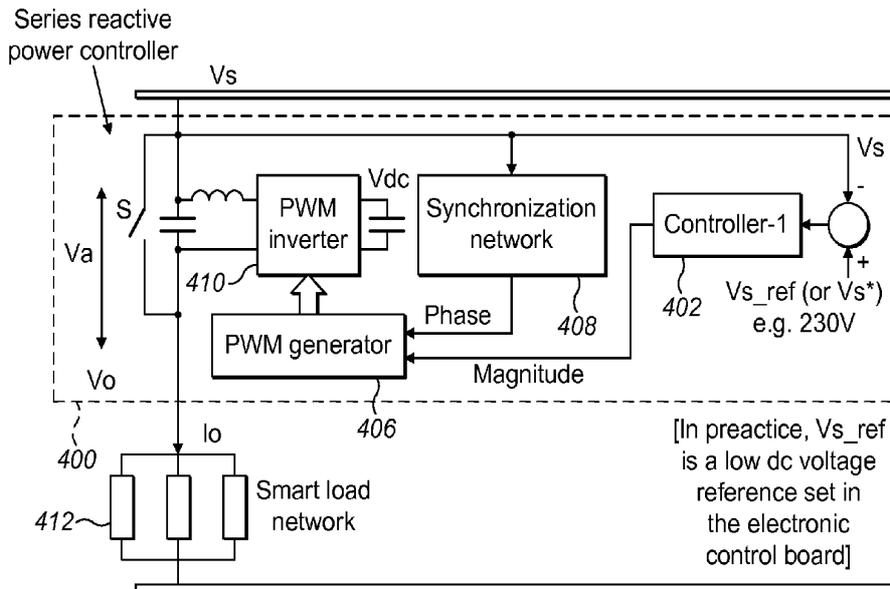


FIG. 4

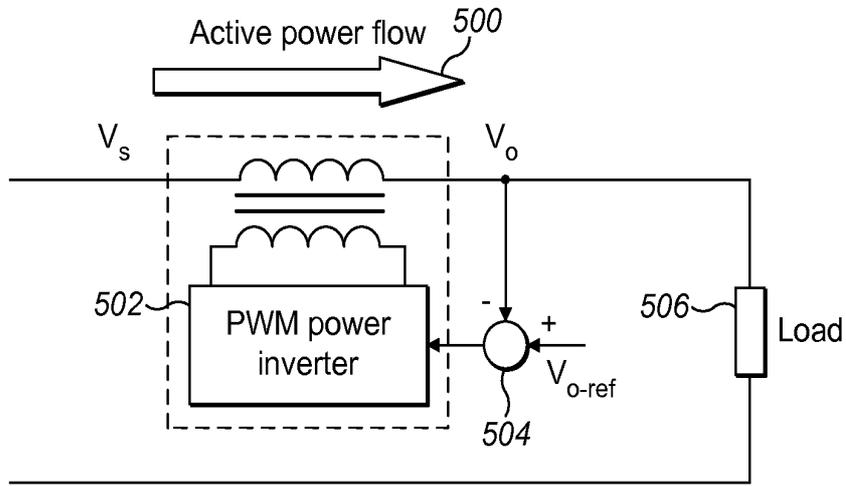


FIG. 5a

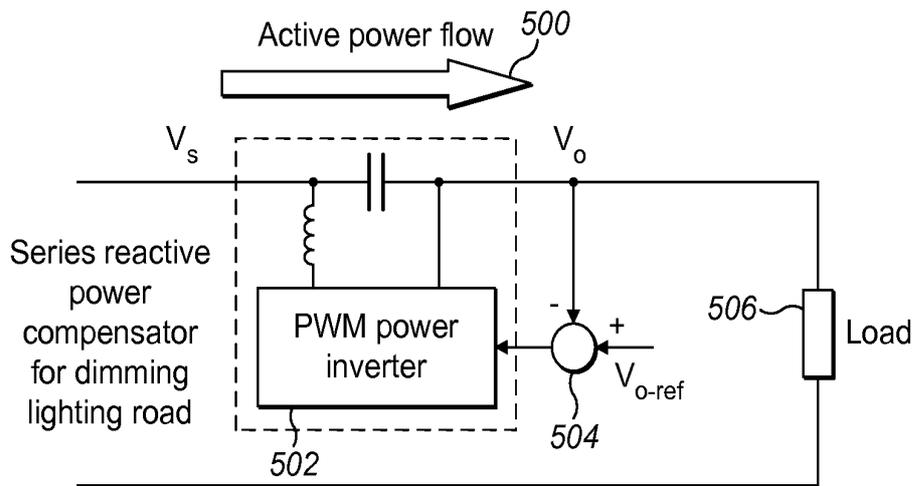


FIG. 5b

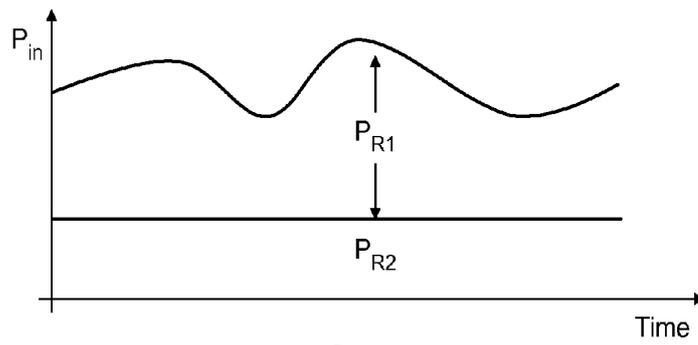


FIG. 6b

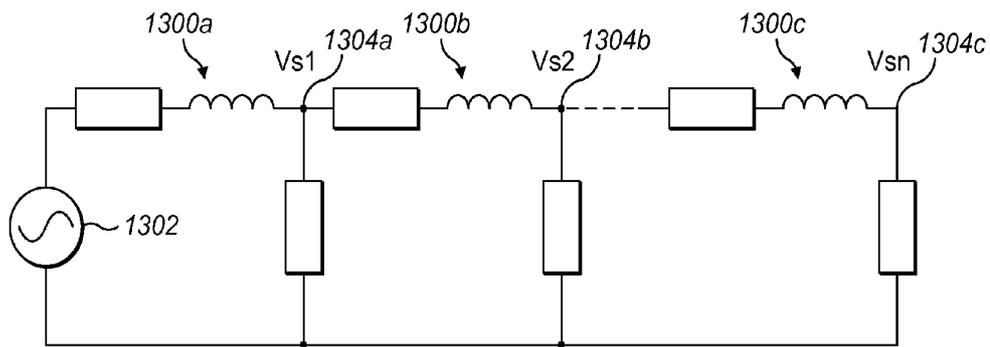


FIG. 7

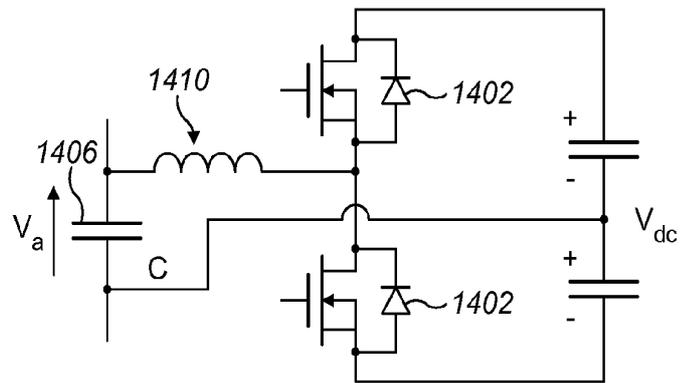


FIG. 8a

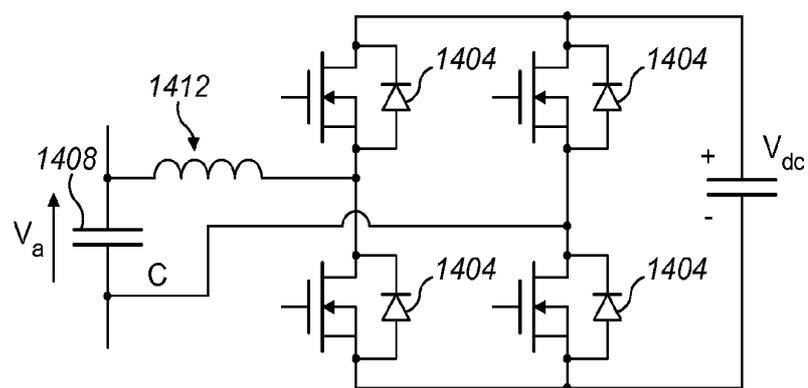


FIG. 8b

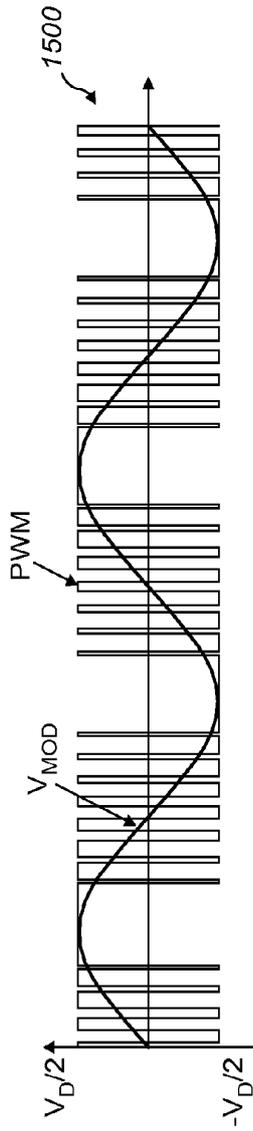


FIG. 9a

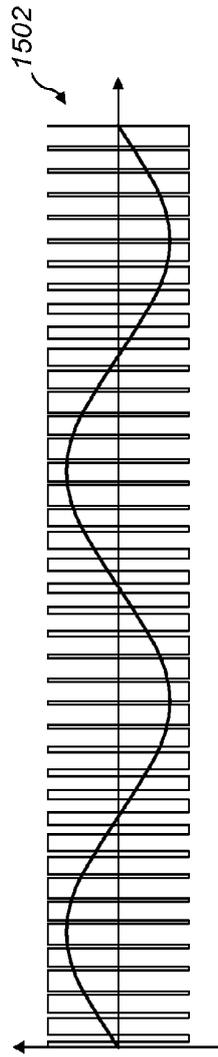


FIG. 9b

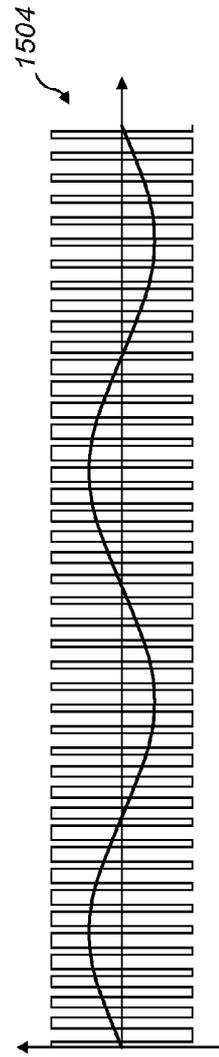


FIG. 9c

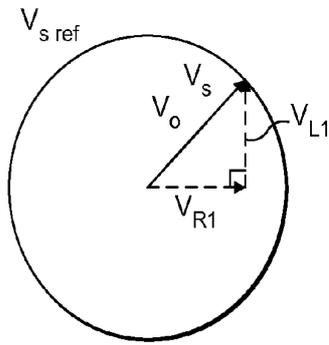


FIG. 10a

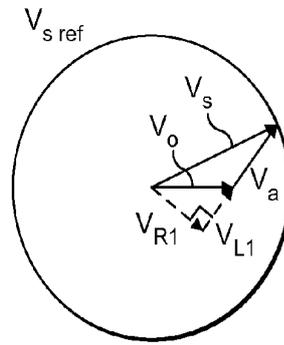


FIG. 10b

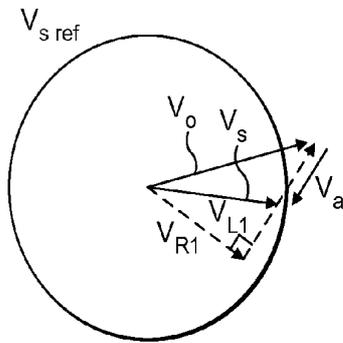


FIG. 10c

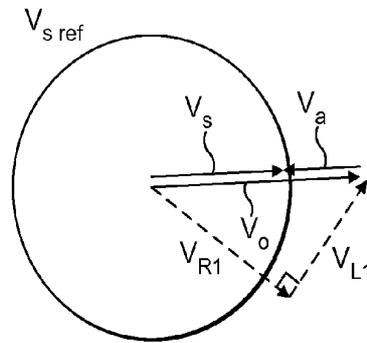


FIG. 10d

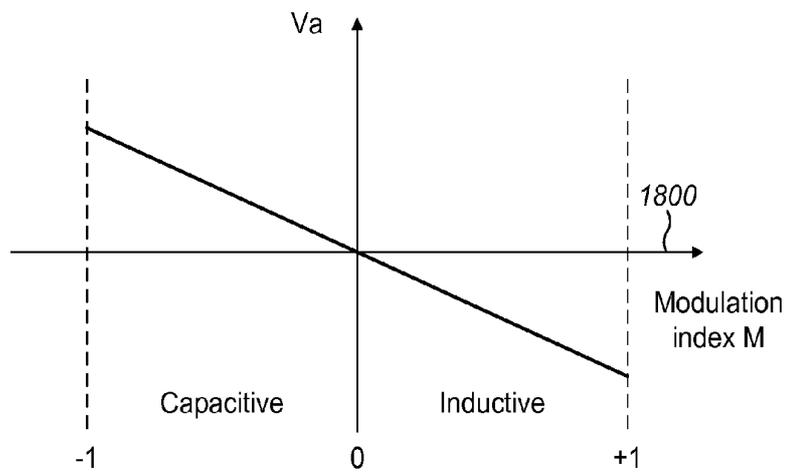


FIG. 11

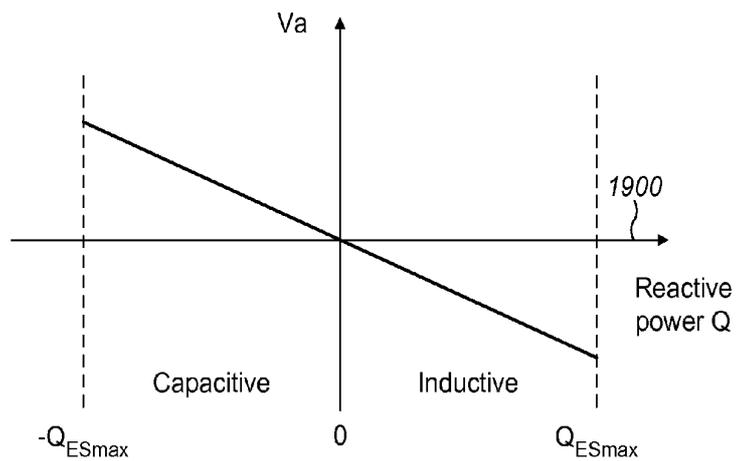


FIG. 12a

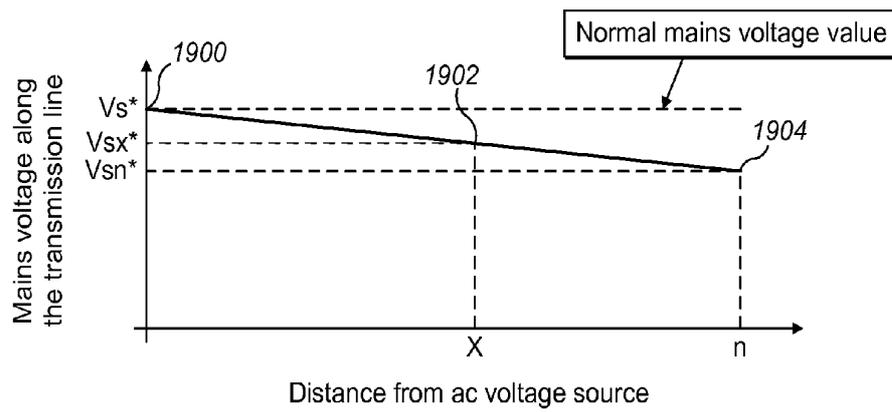


FIG. 12b

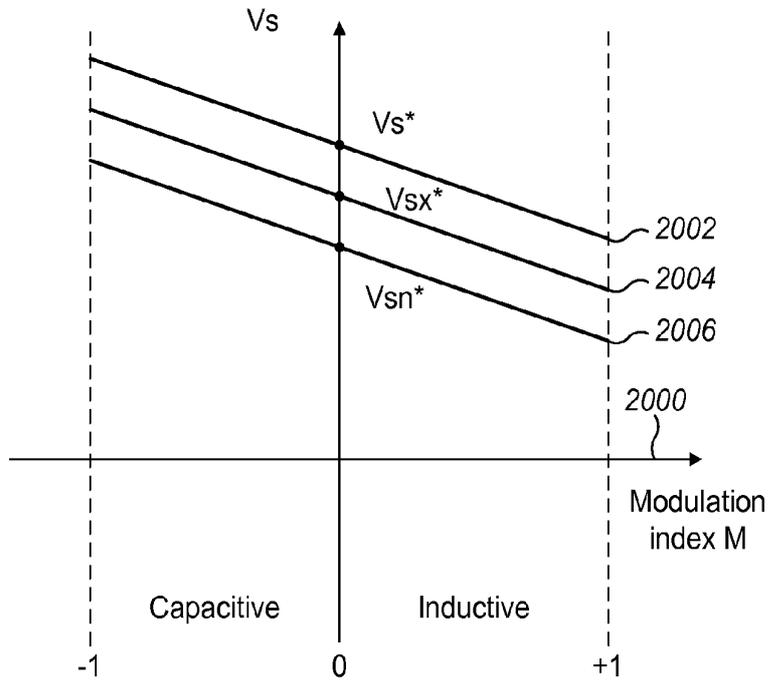


FIG. 13

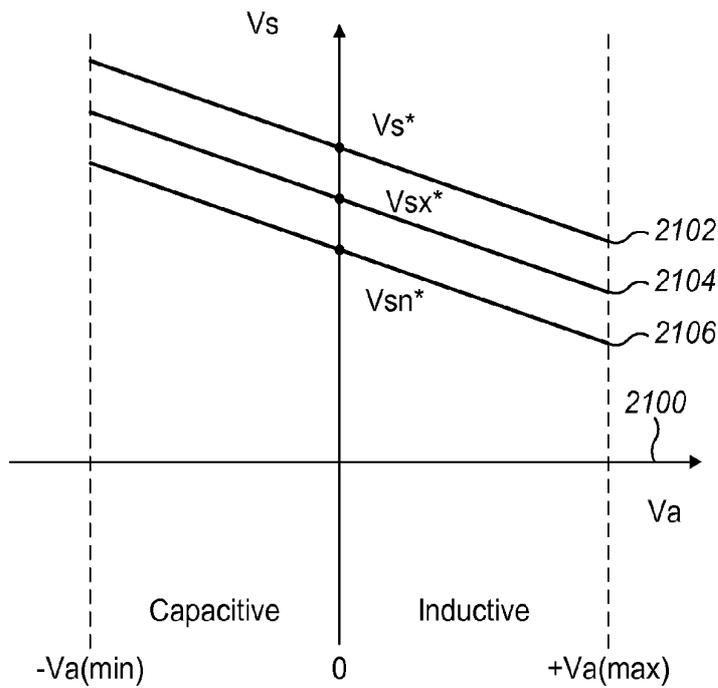


FIG. 14

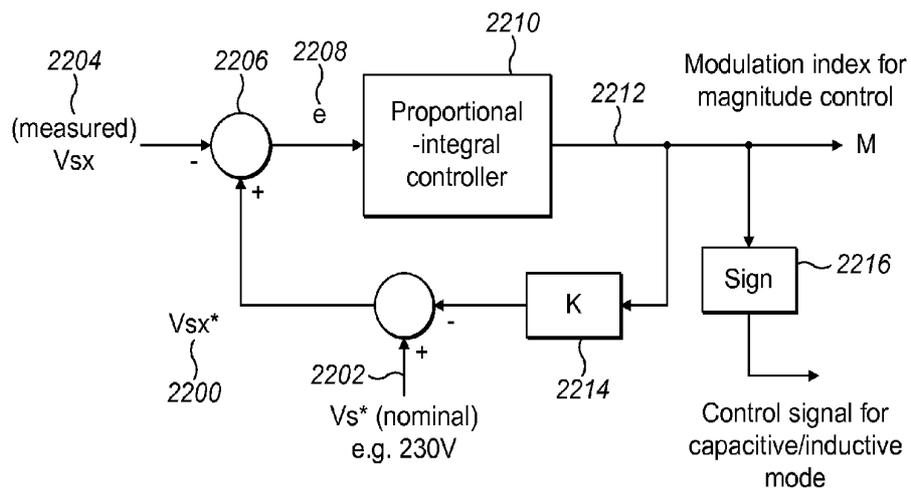


FIG. 15

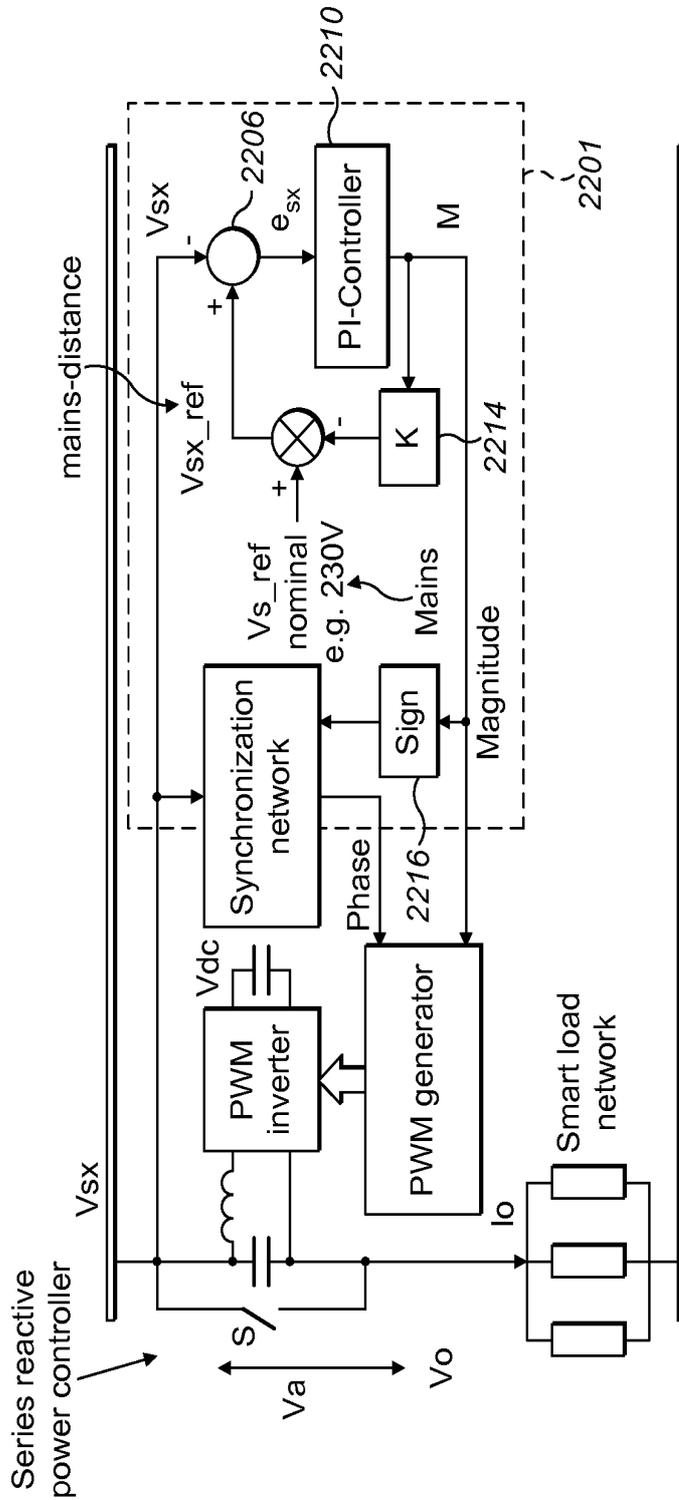


FIG. 16

POWER COMPENSATOR

[0001] The present invention relates to a power compensator.

BACKGROUND OF THE INVENTION

[0002] In traditional power systems, the power flow is controlled by the power generation plants and the rate of power generation follows the load demand of the cities. In future power grids, more and more renewable energy sources will be installed in a distributed manner all over the cities (and thus all over the power grids). Since it is difficult to determine the total rate of power generation of renewable power sources such as wind and solar energy systems, the increasing use of intermittent renewable energy sources is expected to introduce dynamic instability to the ac power supply or commonly called ac mains. In future power grids, the control paradigm has to be changed so that, instead of having the power generation following the load demand as in the case of traditional power systems, the load demand should follow the power generation.

[0003] For voltage compensation, reactive power controllers have been proposed for supporting voltage along transmission lines. FIG. 1a illustrates the basic principle of using a reactive power controller (100) as a series reactive power compensator (controller). When power is transmitted from the power source (102) along the transmission line (104), due to the voltage drop across the winding impedance (106) and resistance (108), the output voltage V_2 is smaller than the input voltage V_1 . Series reactive power controller can be inserted in the output of the transmission line. By generating a compensating voltage V_{comp} , the new output V_2' can be increased to compensate the voltage drop of the power transmission along the transmission lines. In order not to consume power, the voltage vector of the compensating voltage generated by the reactive power controller is perpendicular to the current of the power flow, as indicated in the vector diagram of FIG. 1b in which Vector of V_{comp} is perpendicular to the resistive voltage drop IR (which has the same direction of the current vector I). The use of reactive power controller or compensator to boost the output voltage is a prior art. It should however be noted that, in such prior art, it is the output voltage of the reactive power controller (i.e. the output voltage V_2') is regulated.

[0004] Reactive power controllers will be known to the skilled reader and are power electronics circuits that contain electronic switches and energy storage elements (such as inductors and/or capacitors). They can be used to utilize the storage energy to control the current and voltage in power systems. Referring to FIG. 2, examples of the usage of reactive power controllers 200 include series reactive power compensator 202, shunt (parallel) reactive power compensator 204 and the unified power flow controller (which uses the combination of series and shunt reactive power controllers). For high-power high-voltage applications (e.g. >11 kV), isolation transformers are usually used to provide electrical isolation between the high-voltage transmission lines and the electronic circuits of the reactive power controllers as shown in FIG. 2. However, for applications at the mains voltage of 110V or 230V, isolation transformers are not compulsory. For example, as shown in FIG. 3, series reactive power controller 300 proposed in patents [GB2405540.B and US patent US2007057640] has been used as a central dimming system for lighting system 306 fed by mains voltage without using

isolation transformer. Such use of reactive power controller 302 once again regulates the output voltage of the series reactive controller using a standard "output voltage feedback control".

[0005] In traditional uses of series copy reactive power controllers for voltage regulation, the output voltage of the power controller is usually regulated. Such "output voltage control" is common and its control scheme is illustrated in FIG. 3, in which the output voltage V_o is regulated to a reference voltage V_o^* with the help of traditional "output feedback control".

[0006] However, in further developments it has recently been pointed out in a patent application by HUI, LEE and WU [U.S. patent application, 61/389,489, "Power Control Circuit and Method for Stabilizing a Power Supply" and a PCT application claiming priority therefrom] which are incorporated level by reference in their entirety that, if the "output voltage control of V_o " is changed to "input voltage control of V_s " as shown in FIG. 4, the subtle change in the control loop can offer novel features of the reactive power controller 400, which includes (i) the regulation of the input voltage V_s , (ii) the allowance for the output voltage V_o to fluctuate so that the load power in the output load (R_L) can follow the power profile available from the ac power source that provides the mains voltage.

[0007] In particular, as can be seen in FIG. 4, the power line voltage V_s comprises the control variable to a controller 402 providing an input to a pulse width modulated (PWM) generator 406 in conjunction with a synchronization network input 408 to a pulse width modulator inverter 410 such that the voltage V_0 fluctuates allowing power in the non-critical load 412 to vary such that the voltage V_s can be maintained constant. Since the reactive power controller with input voltage control can provide voltage support for the ac mains, it is called "voltage spring" or "electric spring". The difference of the traditional output control for voltage support in transmission lines (FIG. 5a) and for central dimming system (FIG. 5b) is illustrated in circuit diagrams and compared with the input voltage control for the controller in FIG. 5c. For example in FIG. 5a series reactive power compensation for output voltage support is shown regulated by the output voltage V_0 whereas in FIG. 5b series reactive power compensation for dimming lighting load in relation to the active power flow 500 is shown regulated by V_0 . In both cases an appropriate pulse width modulated power inverter 502 is shown controlled by a V_0 regulated controller with a parallel load 506. However referring FIG. 5c where the reactive power compensation is used as an "electric spring" regulated by V_s , the active power flow 510 is shown as dissipating across non-critical load 512, the reactive controller 514 being controlled by controller 516 to regulate V_s and maintain the desired voltage across a critical load 518.

[0008] To illustrate these features of such electric spring, referring to FIG. 6a,

$$\begin{aligned}
 P_m &= \frac{v_o^2}{R_1} + \frac{v_s^2}{R_2} & (1) \\
 &= \frac{(v_s - v_o)^2}{R_1} + \frac{v_s^2}{R_2} \\
 &= P_{R1} + P_{R2}
 \end{aligned}$$

where P_{in} is the input power from the power supply 600 such as a wind turbine, V_s is the AC mains voltage regulated by controller 608, V_0 is the voltage across the non-critical load R_1 602, V_a is the voltage generated across the reactive power controller 604 (i.e. electric spring). R_2 is the critical load 606 that needs a stable V_s , P_{R1} and P_{R2} are the power consumed by R_1 and R_2 , respectively.

[0009] In general, P_{in} the power generated by a power system with substantial renewable energy sources (with intermittent nature) is not constant. It may vary according to the availability of the renewable power generated with time as shown in FIG. 6b. By using the input voltage control, the root-mean-square value of V_s can be kept constant. Therefore, if V_s is constant in equation (1), P_{R2} is constant. P_{R1} will vary to follow the profile of P_{in} because the “input voltage control of V_s ” will allow V_a to fluctuate so that P_{R1} becomes variable.

[0010] However it is found that in practical implementation, yet further improvements are desired.

[0011] The invention is set out in the claims.

BRIEF DESCRIPTION OF THE FIGURES

[0012] Embodiments of the invention will now be described, by way of example with reference to the accompanying figures, of which:

[0013] FIGS. 1a and 1b show a circuit and its equivalent vector diagram for an AC mains voltage and its transmission line impedance with series reactive power compensation according to a known arrangement.

[0014] FIG. 2 shows a unified power flow controlled based on the combined use of a shunt and series reactive power controller sharing the same DC voltage source according to a known approach.

[0015] FIG. 3 is a schematic of a central dimming system for large scale lighting networks according to a known approach.

[0016] FIG. 4 shows a schematic of a proposed “series type” power line voltage controlled scheme according to a known approach.

[0017] FIG. 5a shows a control schematic of a V0 regulated series reactive power compensator.

[0018] FIG. 5b shows a schematic of a V0 regulated series reactive power compensator for central dimming systems.

[0019] FIG. 5c shows a schematic of a Vs regulated series reactive power compensator.

[0020] FIG. 6a shows a schematic of a series reactive power controller according to a known approach.

[0021] FIG. 6b shows power variation across different components.

[0022] FIG. 7 shows gradual voltage drop along a transmission line.

[0023] FIG. 8a shows a half bridge power inverter for a single phase application according to the invention;

[0024] FIG. 8b shows a full-bridge inverter for a single phase application according to the present invention.

[0025] FIGS. 9a, b and c show magnitude control of sinusoidal PWM switching wave forms of the inverter by modulation index control for creating controllable sinusoidal output voltages after low pass filtering;

[0026] FIGS. 10a to 10d show neutral, voltage reduction, voltage boosting and voltage reduction (energy absorption) modes;

[0027] FIG. 11 shows operating modes of reactive power controllers as a function of modulation index M.

[0028] FIGS. 12a and 12b show operating modes of reactive power controllers as a function of reactive power and reduction of mains voltage along a transmission line.

[0029] FIG. 13 shows ideal characteristics of reactive controllers according to the invention located in different positions along the transmission line.

[0030] FIG. 14 shows the ideal characteristics of reactive controllers located in different positions along the transmission line as a function of voltage.

[0031] FIG. 15 shows a control scheme for providing an automatically adjustable reference voltage.

[0032] FIG. 16 shows a control scheme for reactive controllers with automatically adjustable mains voltage reference for the location along the transmission line.

[0033] In overview, the invention is related to the control methods of reactive power controllers for stabilizing ac power supply. It provides a methodology for allowing reactive power controllers to work in different locations of the transmission lines of an ac power supply and for these reactive power controllers to support and stabilize the ac mains voltage levels at their respective locations of the transmission lines. The control scheme in the proposal allows these reactive power controllers to have automatically adjustable voltage references according to the mains voltage levels at the locations of the transmission lines. The control method can be applied, but not limited to, reactive power controllers embedded in smart electric loads distributed in the power grid for stabilizing and supporting the ac power supply along the transmission lines. It is a method that is useful for example for stabilizing power grids with substantial penetration of renewable power sources or weakly regulated ac power grids.

[0034] In particular, it is recognized that a control loop with a constant reference V_{s_ref} is not appropriate when more than one reactive power controller is used. A further improved control scheme is now described in order that the electric springs can work together when distributed in a power system.

[0035] As described above the controllers described herein can be distributed over the power grid, for embedded in electric appliances such as electric water heaters, refrigerators and road lighting systems. These are suitable “non-critical loads” that can work with a variable mains voltage. FIG. 7 shows an example of having electric loads 1300a, 1300b, 1300c connected along a transmission line. Due to the gradual voltage drop along the transmission line (i.e. voltage drops across the impedance and resistance of the transmission lines), the mains voltage levels along the lines are not identical. Generally, the mains voltage is highest at the power supply source 1302 and decreases gradually towards the end of the transmission line. The mains voltage at different locations (i.e. 1304a, 1304b, 1304c, V_{s1} , V_{s2} , . . . , V_{sn} etc) are not truly identical. For example, if a power transformer 1302 supplies electricity to the many houses in a residential area, the mains voltage nearest the transformer may be 230V (which is the nominal voltage) and that farthest from the transformer may be 210V, because of the voltage drop along the long electric cables along the streets. That is, it is natural that $V_{s1} > V_{s2} > \dots > V_{sn}$.

[0036] This natural phenomenon of gradual voltage change along the transmission lines implies that the use of a “single” value of the reference voltage V_{s^*} for many controllers can be improved further. In practice, the reference voltage V_{s^*} values of the controllers may not be set to the identical value, because the actual mains voltage values that controllers need

to regulate or support are location-dependent. Therefore, a control scheme is proposed implemented in such a way that the voltage reference V_s^* values are automatically adjustable to suit the actual mains voltage values at the specific locations of the electric loads in which the controllers are embedded. This invention is related to such a control scheme that enables the electric springs to have their appropriate voltage reference V_s^* automatically adjustable so that they can work properly regardless of their locations along the transmission lines.

[0037] The approach is implemented in relation to the power electronic circuit of the reactive power controller described above in conjunction with an improved control scheme, using an automatically adjustable mains voltage reference V_s^* . This permits mass deployment of the reactive power controllers as distributed electric springs to stabilize the power grid. FIGS. 8a and 8b show the circuits of a PWM full-bridge power inverter (FIG. 8b) and half-bridge power inverter (FIG. 8a) that can be used as the main power circuit. Diodes 1402, 1404 behave like a diode rectifier through which a dc capacitor (1406, 1408) can be charged to provide the DC voltage source for the power inverter. Referring to FIGS. 9a, 9b and 9c by controlling the modulation index (M) of the pulse-width-modulated (PWM) inverter, a high-quality PWM voltage waveform (1500, 1502, 1504) at the mains frequency can be generated. With the use of the low-pass filter (1410, 1412) comprising an inductor and a capacitor, a sinusoidal voltage (V_a) (1500, 1502, 1504) with controllable magnitude according to the control of the modulation index (M) at the mains frequency can be generated as the output of the LC filter, which is also the voltage provided by reactive power controller (or electric spring). In addition, the phase relationship V_a with respect to V_s can be controlled. In order to ensure that the power inverter acts as a reactive power controller, the vector of the current through the controller and the vector of the voltage across the controller should be ideally perpendicular to each other.

[0038] In one embodiment, in order to introduce automatically adjustable mains voltage reference into the control loop for each reactive power controller a “droop control” concept approach or its equivalent can be employed.

[0039] For example a droop control of the type used in power systems where several generators are used for power generation [B. W. Weedy & B. J. Cory, “Electric Power Systems”, 4th Edition, New York, Wiley, 1998] or for the control of parallel power inverters [Karel De Brabandere et al, “A voltage and frequency droop control method for parallel inverters”, IEEE Transactions on Power Electronics, Vol. 22, No. 4, July 2007, pp. 1107-1115] can be adopted. Voltage and frequency droop control methods enable the generators to work in parallel in order to be synchronized in frequency and achieve stable operation.

[0040] Surprisingly, although reactive power controllers theoretically do not handle active power, such that their behaviors are different from electric generators and power inverters, it is found that control schemes of this nature are suitable for the present invention.

[0041] The manner in which V_s^* can be set for individual controllers will now be described in more detail with reference to the set-up shown in FIG. 6. As can be seen in FIG. 6a power source 600 such as a wind turbine 601 is rectified at AC-DC rectifier 603 and supplies power line 605 via grid connected inverter 607. Voltage V_s across series reactive power controller 604 and load 602 allows variation of V_s across controller 604 in conjunction with V_s across load 602

to provide a desired voltage across critical load 606, by maintaining V_s at V_s -ref at controller 608.

[0042] The aim of the controller in the application example of FIG. 6 is to restore v_s to the nominal value of the mains voltage v_{s_ref} . Let P_w be the sum of dynamically-changing wind power and a certain base power generated by an AC power source such as an AC generator. The general power balance equation for the system in FIG. 6 is:

$$P_w = \left(\frac{V_o}{Z_1}\right)^2 \text{Re}(Z_1) + \left(\frac{V_s}{Z_2}\right)^2 \text{Re}(Z_2) \quad (2)$$

$$P_w = P_1 + P_2$$

where $\text{Re}(Z)$ is the real part of Z that represents the resistive element R . . . Z_1 is the impedance of the “non-critical” load and Z_2 is the impedance of the “critical” load.

[0043] The vector equation for the controller (1608) is:

$$V_o = V_s - V_a \quad (3)$$

[0044] As discussed above, equation (3) shows that, if the mains voltage is regulated by the controller at the nominal value v_{s_ref} , the second power term P_2 should remain constant for the critical load. If the power generated P_{in} cannot meet the full power for both P_1 and P_2 , the input-voltage control of the controller will generate a voltage vector v_a to keep v_s regulated at v_{s_ref} . From (3), the voltage vector v_o across Z_1 will be reduced and so the power consumption (P_1) of Z_1 will also be reduced. Therefore, if the controller performs well, P_2 for the critical load should remain constant as expected and P_1 for the non-critical load should follow the power generation profile.

[0045] Continuing the mechanical spring analogy presented above, where such a spring cannot be extended beyond a certain displacement, controller also has its operating limit. FIGS. 10a-10d shows the vector diagrams of the system (FIG. 6) with the controller under four operating modes. The circle in the vector diagram represents the nominal value of the mains voltage v_{s_ref} (e.g. 220V). The vectors are assumed to rotate in an anticlockwise direction at the mains frequency (e.g. 50 Hz). FIG. 10a depicts the situation when the controller is in a “neutral” position in which $v_a=0$. This refers to the situation that the power generated by the renewable power source (600) (such as a wind farm) is sufficient to meet the load demand and simultaneously maintain v_s at the nominal value of v_{s_ref} . FIG. 10b represents the situation when power reduction in Z_1 is needed in order to keep v_s at v_{s_ref} . Here v_a is positive in order to provide the “voltage boosting” function under the capacitive mode of the electric spring. If the generated power is higher than the load demand, v_s will exceed v_{s_ref} resulting in an over-voltage situation. In order to regulate v_s at v_{s_ref} FIG. 10c shows that the controller can provide “voltage reduction” function by operating under the inductive mode. Here v_o is increased, with respect to its value in FIG. 10b, in order that the load Z_1 can consume more power generated by the renewable energy source to keep the power balance. The scalar equation for electric spring voltage vector v_a under the capacitive mode (FIG. 10b) and inductive mode (FIG. 10c) is given (3):

$$v_a = \begin{cases} -v_c & \text{for capacitive mode} \\ +v_c & \text{for inductive mode} \end{cases} \quad (4)$$

where v_c is the voltage of the filter capacitor of the power inverter.

[0046] In the three operating modes described in FIGS. 10a-10c, the controller operates in a lossless manner and does not consume energy. However, if the generated power is excessive, the voltage across Z_1 (i.e. v_0) may exceed v_{s_ref} as shown in FIG. 10d, the controller cannot maintain v_s at v_{s_ref} under the capacitive (FIG. 10b) and inductive (FIG. 10c) modes. Under the capacitive or inductive operating modes, the electric spring voltage vector v_a , which has to be perpendicular with v_{R1} (or in parallel with vector v_{L1}) for reactive power operation, cannot touch the circle and thus reduce v_s to v_{s_ref} . Under this situation, the controller (1604) has to absorb real power and transfer it to somewhere else such as an energy storage element (not shown) which can be any appropriate element such as a battery through another path. In this operation in FIG. 10d, the vector v_a is no longer perpendicular to v_{R1} . Therefore, the controller on its own without active power absorption means is more effective in voltage boosting than voltage reduction.

[0047] It can be seen that the capacitive mode provides voltage support while inductive mode provides voltage suppression for the ac power system. Such relationship can be graphically illustrated in FIG. 11, in which the x-axis refers to the modulation (1800) of the PWM voltage, which is effectively an indication of the magnitude of the filtered sinusoidal voltage waveform generated by the controller. In physical terms, the capacitive and inductive modes can be represented as a reference to the reactive power Q provided by the controller as shown in FIG. 12a. Here, when the controller provides negative reactive power, it provides voltage support (i.e. positive Va). When it provides positive Q, it generates negative Va.

[0048] As discussed above, due to the fact that (i) these controllers will be distributed and installed in different locations along the transmission lines and (ii) there is voltage drop along the transmission lines, the exact mains voltage reference values that these controllers need to maintain as their respective reference values are location-dependent and therefore not identical. As shown in FIG. 12b, the reference mains voltage for the controller installed immediately next to the ac voltage source (that may come from a step-down transformer) is V_s^* 1900. For a controller installed at a distance x from the ac voltage source, the mains voltage reference may drop to V_{sx}^* 1902. For a further installation at the end of the transmission line (i.e. distance n) from the ac voltage source, such mains voltage reference will be reduced to a lower value V_{sn}^* 1904. Therefore, the voltage droop characteristics of these three controllers are similar in nature, but different in values of the mains voltage references as indicated in FIG. 13 (modulation index M (2000), and corresponding V_s^* (2002), V_{sx}^* (2004) and V_{sn}^* (2006)) and FIG. 14 (Va (2100), and corresponding V_s^* (2102), V_{sx}^* (2104) and V_{sn}^* (2106)).

[0049] With reference to FIG. 15, in order to enable each controller to produce an automatically adjustable mains voltage reference value V_{sx}^* (2200) for a nominal mains voltage V_s^* (2202) (e.g. 230V), a control scheme that can be implemented the control board of each controller is proposed. The basic concept is illustrated by the schematic of control block

as shown in FIG. 16 as an example. It should however be stressed that other control blocks with the same control objectives can also be used. The control scheme can be implemented in analogue or digital form, or a combination of both.

[0050] Without loss of generality, the controller is assumed to be installed at a distance x from the ac voltage source which has a "nominal" mains voltage V_s^* (2202) (e.g. 230V or 110V). This electric spring is connected to the mains voltage at which the actual (measured) mains voltage is V_{sx} (2204). The control scheme generates an adjustable reference voltage V_{sx}^* (2200), which suits the actual mains voltage at location-x of the transmission or distribution lines. The measured V_{sx} (2204) is subtracted from the V_{sx}^* (2200) at subtractor (2206) and the difference or error signal e (2208) is fed to a proportional-integral (PI) controller (2210). The output of the PI control is the modulation index (M) (2212). M is fed to a gain (2214) K and the signal MK is subtracted at the subtractor (2206) from the nominal mains voltage (2202) V_s^* to form the generated adjustable mains voltage reference V_{sx}^* . The polarity of M provides a control signal (2216) for the capacitive mode or inductive mode of operation.

[0051] The principle of the control scheme can be illustrated with the following control equations:

$$v_{sx}^* = v_s^* - MK \quad (5)$$

$$e = (v_s^* - MK) - v_{sx} \quad (6)$$

[0052] Equation (5) indicates that the adjustable mains voltage reference V_{sx}^* depends on the droop characteristic which is represented by the constant gain K. Since M is a variable, the $-MK$ term on the right-hand side allows this reference voltage to be adjusted according to the voltage drop along the transmission lines.

[0053] Since the function of the PI-controller is to keep the error signal (e) to zero, equation (6) shows that the operation of the control scheme is to force the measured V_{sx} to approach the automatically adjustable reference V_{sx}^* .

[0054] The equation for the modulation index M is:

$$M = k_p(e) + k_i \int (e) dt \quad (7)$$

where k_p is the proportional coefficient and k_i is the integral coefficient of the PI controller.

[0055] Of course it will be recognised that other control scheme can be adopted and the PI controllers are merely one possible implementation for achieving the control equations (5), (6).

[0056] Therefore, it is proposed in this invention that the control scheme previously suggested in FIG. 6a be modified to the control scheme indicated in the dotted box of FIG. 16. In this way, many electric springs can work independently and also in group regardless of their installation locations in the power grid.

[0057] As can be seen in FIG. 16, the controller of FIG. 15 is provided as controller 2201. As discussed, the control scheme allows control of the voltage across the reactive controller to compensate for droop in the voltage at the location of the controller. Hence instead of tracking the voltage at the origin of the power transmission line the corrected reference voltage of the relevant location is correct. Selection of the gain value K allows the droop characteristic to be incorporated.

[0058] The gain value of K can be preset per device, set at installation or can be remotely set for example via wired or wireless means across a distributed network. Control

schemes and approaches to setting the reference voltage value can be adopted as appropriate.

[0059] In practice the proposed control scheme provides additional benefits. Using the controller but without using the proposed control scheme, it is important to note that the most upstream controller provides maximum positive reactive power (i.e. maximum and positive Q_{a1}), meaning that it is operating in its inductive mode to “suppress” its mains voltage at a nominal level V_{s1} . At the same time, the most downstream controller operates mainly in the capacitive mode by generating primarily negative reactive power (i.e. maximum negative reactive power Q_{a3}) to support the mains voltage V_{s3} , from the instantaneous value of V_{s3} which stays below the nominal voltage. Therefore, it can be seen that the controllers work “against” each other, instead of cooperating “with” each other. The action of an intermediate controller fluctuates between the two extremes.

[0060] In the above example, the controllers without the proposed control scheme can still regulate the mains voltage even though some of them conflict, as the reactive power capacities are sufficient to compensate the reactive power required for the voltage regulation in the setup. However, where the reactive power capacity of the controller is smaller, this may not be possible.

[0061] Under the proposed compensation control scheme, all the controllers generate reactive power in a similar manner to compensate the voltage fluctuation. This means that they are “co-operating” to regulate the mains voltage levels at their respective locations of the transmission line.

[0062] Hence even if individual controllers may have limited reactive power capacities, the proposed control scheme enables them to work together in order to maximize their effects for reactive power compensation, which is an effective means to provide voltage regulation in power grid. While traditional reactive power controllers provide reactive power compensation only, the extra “non-critical load shedding” function of the controllers according to the invention offers automatic power flow control which brings extra benefits to frequency stability control.

[0063] It will be appreciated that the approaches described herein can be used in relation to a power transmission system of any magnitude and level of distribution and using controllers in conjunction with any appropriate non-critical load and realised in any appropriate manner permitting voltage compensation in the manner described.

[0064] Although the invention has been described with reference to specific examples, it will be appreciated by those skilled in the art that the invention can be embodied in many other forms. It will also be appreciated by those skilled in the art that the features of the various examples described can be combined in other combinations.

1. A power compensator for compensating voltage at a location along a power transmission line, the compensator having a controller for controlling a voltage generated across the compensator, wherein the voltage is controlled to maintain a power transmission line voltage at a value dependent on the power transmission line location.

2. A compensator as claimed as claim 1 comprising a reactive power compensator.

3. A compensator as claimed in claim 1 in which the controller is arranged to provide control according to a gain value.

4. A compensator as claimed in claim 3 in which the gain value is locally set.

5. A compensator as claimed in claim 3 in which the gain value is remotely set.

6. A power compensation system comprising a power compensator as claimed in any preceding claims and at least one load.

7. A system as claimed in claim 6 in which the load comprises an appliance.

8. A system as claimed in claim 6 in which the load comprises an overload load.

9. A system as claimed in claim 3 further comprising a critical load in parallel with the compensator in which the compensator compensates to provide voltage across the critical load at the value dependent on the power transmission line location.

10. A power transmission system comprising a power transmission line and plurality of compensators or systems as claimed in claim 1 at respective locations on the power transmission line having respective voltage values at each location.

11. A system as claimed in claim 10 in which the power transmission line comprises a distribution line.

12. A method of providing power compensation at a location along a power transmission line comprising controlling a voltage generated across a power compensator at the location to maintain a power transmission line voltage at a value dependent on the location.

* * * * *